

**Specifications**


- ✓ Machine weight 2.270 kg
- ✓ Tractor requirement - 120-150 hp, 540 RPM, 2 hydraulic outlets
- ✓ Capacity 200-220 ton/h
- ✓ 265R16 MT truck tires
- ✓ 540 PTO drives all auger & conveyor
- ✓ Hitches to tractor using Category II three point hitch
- ✓ Augers and rear roller fold to transport width of 2,6 m

**Features**

- ✓ Trailer towing hitch
- ✓ Lock out wheel hubs
- ✓ Dual knives split bag
- ✓ Rubber paddle conveyor
- ✓ One person operation
- ✓ Mechanical bevel gearbox drive
- ✓ Swinging auger for loading trucks on either side of bag

**Specifications:**

Weight	kg	2.270
Capacity	t/h	200 - 220
Transport width (with folded auger)	m	2.6
Tractor	hp	120 - 150
PTO (2 hydraulic outlets)	rpm	540
Tires	265R16	
Hitch	Category II three point hitch	

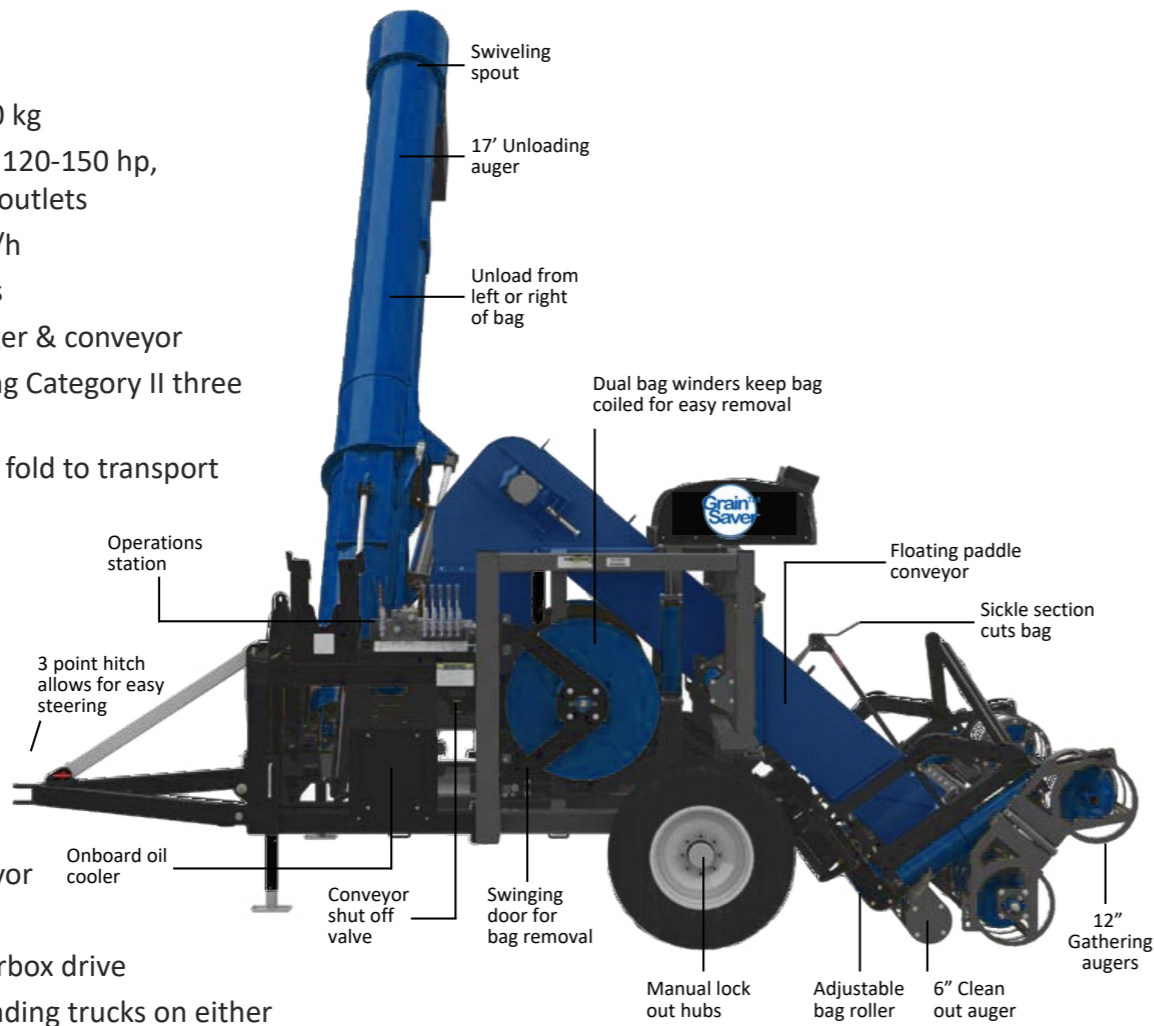

**GS EXTRACTOR KOYKER**

High outtake capacity with proven reliability. Debags, wraps up silobags at more than 200 tons/h. With a swinging auger to unload at any side of the bag.



Per Christerson  
Tel. +46-70-3216262  
per@farmmac.com

Krister Wiengren  
Tel. +46-73-3335130  
krister@farmmac.com

DISCLAIMER: Grain Saver is continually being further developed. We reserve the right to change specifications, prices and models at any time. Illustrations and specifications are approximately binding.

[www.grainsaver.com](http://www.grainsaver.com)

[www.grainsaver.com](http://www.grainsaver.com)